

## MAIN FEATURES

Powered by



**Standby Power Rating**  
60 kVA, 48 kWe, 50 Hz

**Prime Power Rating**  
55 kVA, 44 kWe, 50 Hz

| Service      |        | Standby <sup>1</sup> | Prime <sup>2</sup> |
|--------------|--------|----------------------|--------------------|
| Speed        | (rpm)  | 1500                 |                    |
| Voltage      | (V)    | 400/230              |                    |
| Current      | (A)    | 86                   | 79                 |
| Power Factor | (Cosφ) | 0.80                 |                    |

Industrial Water Cooled

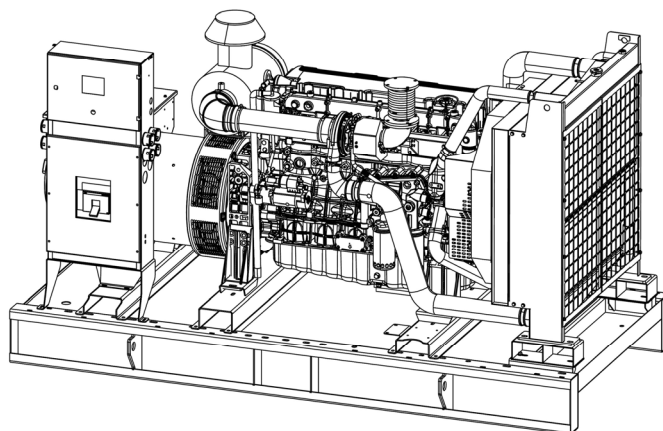


Image used for illustration purposes only

## CODES AND STANDARDS



ISO 9001:2015  
ISO 10002:2018

ISO 14001:2015  
ISO 45001:2018



EN ISO 8528-13:2016  
EN ISO 8528-4  
EN ISO 8528-5  
EN ISO 8528-8  
EN ISO 12100:2010  
EN ISO 13857:2019

EN 60204-1:2018  
EN 60034-1:2010/AC:2010  
EN 61439-1:2011  
EN 61439-2:2011  
EN 61000-6-2:2019  
EN 61000-6-4:2007/A1:2011



BS EN 60034-5  
BS ISO 8528-5

BS ISO 8528-5  
BS EN ISO 8528-13



BS EN ISO 9227  
BS EN ISO 2178

BS EN ISO 2409



EN 60204-1:2015  
EN 61000-6-2:2015

EN 61000-6-4:2016  
EN ISO 8528-13:2016



GOST-R 51769:2001  
GOST-R ISO 13849-1:2003  
GOST-R 54145-2010  
GOST-R IEC 62198:2015  
GOST-R 51901-1:2002

GOST-R 15150-69  
GOST-R 51338-99  
GOST-R 2787-75  
GOST-R 24297:2013  
GOST-R 33855:2016

Not all codes and standards apply to all configurations.  
Contact factory for details.

## STANDBY POWER<sup>1</sup>

According to ISO 8528-1:2018, emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70% of the ESP. There isn't any overload capability above stand by power rate.

## PRIME POWER<sup>2</sup>

According to ISO 8528-1:2018, prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70% of the PRP. 10% overload permissible for 1 hour in every 12 hours.

## STANDARD REFERENCE CONDITIONS

Output ratings are presented at 25°C air inlet temperature, barometric pressure 100 kPa, relative humidity 30%. This generating set is designed to operate at high ambient temperatures (up to 50°C), humidity (up to 70%) and higher

altitudes. In case of specific site conditions, genset output power may derate. For such conditions, please consult your dealer to choose the correct product. Some of the specifications are not standard on all genset models



## **STANDARD FEATURES**

---

### **ENGINE**

State of the art technology, water cooled, four stroke heavy duty high performance industrial type diesel engine.

### **COOLING SYSTEM**

Made of quality industrial type radiator, expansion tank and cooling fan keeps the engine system at the appropriate temperature of the generator equipment. Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures.

### **ELECTRICAL SYSTEM**

Battery group (12V or 24V), redresser, battery tray and cables are provided with genset. The charging alternator is mounted on the engine and is driven by a belt-pulley. DC starting motor to crank the engine is available mounted on the engine.

### **FUEL SYSTEM**

On Generating Sets up to 1250 kVA, the base-frame design is incorporated with an integral fuel tank with a capacity of approx. 8 hours running at full load. The tank is supplied complete with fill cap breather, fuel level gage, fuel feed and return lines to the engine and drain plug. Higher capacities and double-walled fuel tanks are also available as an option.

### **LUBRICATION SYSTEM**

Our diesel generators feature an efficient oil pump and integrated filtration system, ensuring optimal lubrication and removal of impurities from the engine oil. Equipped with low oil pressure sensors, they automatically trigger an emergency shutdown to protect the engine in critical situations. This advanced oil management system reduces friction among moving parts, extending the engine's lifespan and ensuring reliable performance. With these features, our generators offer superior protection and efficiency, making them an excellent choice for your power needs.

### **EXHAUST SILENCER**

Heavy duty steel industrial type exhaust silencer. The silencer noise reduction level is 10-15 dB(A). Higher capacity silencers are also available as residential, critical or hospital types as option.

### **CUSTOMIZED SOLUTIONS**

DMO Power customized power systems, as tailor made production built and tested by a dedicated team of experienced engineers and technicians, which means it can meet the most demanding specifications. When you combine our industry experience with our agile manufacturing process, you get reliable, purpose-built solutions.

### **SOUND ATTENUATED CANOPIES**

Sound insulated canopies are produced from galvanized sheets in accordance with rust and harsh weather conditions, as modular design canopies are cleaned with a special process and painted with electrostatic powder paint. DMO Power canopies have a modular structure that can be easily disassembled, providing the group with easy service and maintenance and on-site parts replacement. At the same time, the canopies are designed to take into account the cooling performance and power output value of the generator set according to the ambient temperature and are designed to not cause any power drop during operation. Canopies are produced after prototype tests are carried out for suitability to ambient temperature and sound level.

Container type and super silent canopies are also offered optionally according to customer demand.

### **ALTERNATOR**

Synchronous 4 Poles, 3 phase, self-excited, brushless alternators are designed to offer you the best power generation performances. The insulation system is Class H. All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin. Heavy coating of antitracking varnish provides additional protection against moisture or condensation. The fully sealed Automatic Voltage Regulator (AVR) maintains voltage regulation up to  $\pm 1\%$  nominal adjustment by means of a trim pot incorporated on AVR. When the PMG or AREP option is installed, an overload capacity equivalent to 300% of the full load impedance can be sustained for 10 seconds at Power Factor "Cos $\phi$  = 1".

### **FACTORY ACCEPTANCE TESTS**

All generator sets manufactured at DMO Power facilities are subjected to load testing before being shipped. Control functions of all protective devices and field load conditions are implemented by simulation.

### **DOCUMENTATION**

Maintenance and user manuals related to engine, generator and controller. Wiring diagram/Electric schematic.

### **WARRANTY**

All our generator sets are covered by a warranty against manufacturing defects in materials and workmanship. The warranty conditions, which also cover the equipment on the generator, vary according to the local conditions of the country where the product is operated.





**D.M.O Power**

**DMO60LL | 60 kVA**  
**DIESEL GENERATOR SET**

## STANDARD FEATURES

DSE4520 MKII (STANDARD)



DSE 6120 MKII



DSE 7320 MKII



CRE AMF COMPACT



### ADVANCED GENSET CONTROLLERS

The Genset Control Unit is an Auto Start Control Module for single genset applications. It includes a backlight LCD display which clearly shows the status of the engine all the time. This module can either be programmed using the front panel or by using the AMF configuration suite PC software.

DSE4520 MKII controller is suitable as a simple user-friendly module.

### METERING & ALARM INDICATORS

- Generator volts (L-L, L-N)
- Generator frequency
- Under speed, Overspeed
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Fuel level (Warning or shutdown)
- Hours run counter
- Battery voltage
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage / frequency
- Charge fail
- Loss of magnetic pick-up signal

### COMMUNICATIONS

- Modbus RS-485, Modbus TCP/IP (optional)
- Ethernet, GSM-GPRS (optional)
- Internal GPRS modem (optional)
- Embedded web server (optional)
- Web monitoring, Web programming (optional)
- GSM-SMS (optional)
- Email (optional)
- SNMP (optional)
- USB host (optional)
- USB device
- RS-485 (optional)
- RS-232 (optional)
- Micro SD card slot (optional)
- J1939-CANBUS

### CONTROLLERS FUNCTION

- AMF function
- Contactor/CB control outputs for ATS load transfer
- Remote start
- Manual start
- Engine controller
- Remote display & control unit (optional)
- Waveform display of V & I
- Harmonic analysis of V & I
- Current transformers at genset or load side

DMO Power uses state-of-the-art technology genset control units like Deepsea and CRE combining multi-functionality and wide communication possibilities together with a reliable design. These units comply and mostly exceed the world's tightest safety, EMC, vibration and environmental standards for the industrial category. Software features are complete with easy firmware upgrade process through USB port. The Windows based PC software allows monitoring and programming through USB, RS-485, Ethernet and GPRS. The PC based Scada software allows monitoring and control of an unlimited number of gensets from a single central location.





**D.M.O Power**

**DMO60LL | 60 kVA**  
**DIESEL GENERATORSET**

## STANDARD FEATURES

---

- |                                                              |                                                           |
|--------------------------------------------------------------|-----------------------------------------------------------|
| <input type="checkbox"/> Antivibration Pads                  | <input type="checkbox"/> Air, Oil and Fuel Filters        |
| <input type="checkbox"/> Radiator Mounted on the Genset      | <input type="checkbox"/> Battery Group and Cables         |
| <input type="checkbox"/> Charge Alternator                   | <input type="checkbox"/> Starter Motor                    |
| <input type="checkbox"/> Deepsea 4520MKII Control Module     | <input type="checkbox"/> Emergency Stop Button            |
| <input type="checkbox"/> Integrated Fuel Tank up to 1250 kVA | <input type="checkbox"/> Industrial Type Exhaust Silencer |
| <input type="checkbox"/> Oil and Coolant                     | <input type="checkbox"/> User & Maintenance Manual        |

## OPTIONAL FEATURES

---

- |                                                                                     |                                                                              |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <input type="checkbox"/> 3P or 4P Alternator Protection Circuit Breaker             | <input type="checkbox"/> External Fuel Tanks                                 |
| <input type="checkbox"/> 3P or 4P Automatic Transfer Panel                          | <input type="checkbox"/> Undebased or External Type Double-Walled Fuel       |
| <input type="checkbox"/> Fuel-Water Separator                                       | <input type="checkbox"/> Tank Automatic Fuel Transfer Pump                   |
| <input type="checkbox"/> Oil Heater                                                 | <input type="checkbox"/> Electrical or Manual Oil Drainage Pump              |
| <input type="checkbox"/> Alternator Winding Heater                                  | <input type="checkbox"/> Electrical or Manual Air Intake and Exhaust Louvers |
| <input type="checkbox"/> Alternator Temperature Sensors (RTD's)                     | <input type="checkbox"/> Air Intake Heater                                   |
| <input type="checkbox"/> Charging Current Ammeter                                   | <input type="checkbox"/> Remote Cooling System                               |
| <input type="checkbox"/> Battery Circuit Breaker                                    | <input type="checkbox"/> Different Voltage and/or Frequency Options          |
| <input type="checkbox"/> PMG Excitation System                                      | <input type="checkbox"/> Modular Type Sound Attenuated Canopy                |
| <input type="checkbox"/> Control Panel with Analog Gauges                           | <input type="checkbox"/> Container Type Sound Attenuated Canopy              |
| <input type="checkbox"/> Set Mounted or Separately Designed Synchronization Systems |                                                                              |
| <input type="checkbox"/> Battery Charger                                            |                                                                              |
| <input type="checkbox"/> Engine Jacket Water Heater                                 |                                                                              |



## ENGINE SPECIFICATIONS

|                                       |             |                  |
|---------------------------------------|-------------|------------------|
| Model                                 |             | LP443G1          |
| Speed                                 | (rpm)       | 1500             |
| Prime Power, net                      | (kWm)       | 51               |
| Standby Power, net                    | (kWm)       | 56               |
| Cycle                                 |             | Diesel, 4 Stroke |
| Emission Standard                     |             | Stage II         |
| Injection System                      |             | Direct           |
| Governor                              |             | Electronic       |
| Intake Air Aspiration & Configuration |             | Natural          |
| Number Of Cylinder                    |             | 4 - In-line      |
| Bore x Stroke                         | (mm)        | 105x124          |
| Displacement                          | (l)         | 4,3              |
| Fuel Consumption                      | @ 100% Load | (l/h) 15,1       |
|                                       | @ 75% Load  | (l/h) 11,8       |
|                                       | @ 50% Load  | (l/h) 8,1        |
| Starting System                       | (VDC)       | 24               |
| Cooling System                        |             | Liquid Cooled    |
| Coolant Capacity                      | (l)         | 29               |
| Lube Oil Capacity                     | (l)         | 13               |

## GENSET CONTROLLER

|            |          |
|------------|----------|
| Controller | DEEPSEA  |
| Model      | 4520MKII |

## ALTERNATOR SPECIFICATIONS

|                                 |       |                  |
|---------------------------------|-------|------------------|
| Prime Power                     | (kVA) | 63               |
| Standby Power                   | (kVA) | 70               |
| Poles                           |       | 4                |
| Number Of Phase                 |       | 3                |
| Number Of Bearing               |       | Single           |
| Insulation Class                |       | H                |
| Number Of Wires                 |       | 12/6             |
| Winding Pitch                   |       | 2/3              |
| Protection Class                |       | IP23             |
| Cooling                         |       | Self-Ventilating |
| Voltage Regulator               |       | Electronic AVR   |
| Steady State Voltage Regulation | (%)   | ±1               |
| THD (No Load)                   | (%)   | < 1,5            |
| THD (Linear Load)               | (%)   | < 5              |
| Excitation                      |       | Self-Excitation  |





**D.M.O Power**


**DMO60LL| 60 kVA**  
**DIESEL GENERATORSET**

## CANOPY TYPE DIMENSIONS

|        |      |      |
|--------|------|------|
| Weight | (kg) | 1600 |
|--------|------|------|

Fuel Tank Capacity: 700Lit

(\*) The unit of dimensions is "mm".

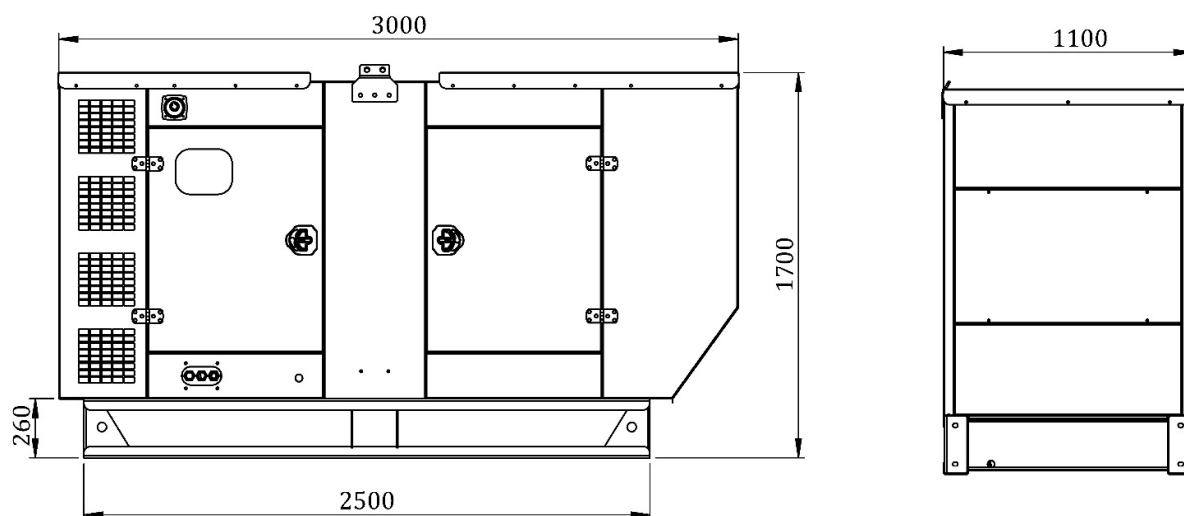

## OPEN TYPE DIMENSIONS

|        |      |      |
|--------|------|------|
| Weight | (kg) | 1300 |
|--------|------|------|

